

ANT-127-001

9 dBi 24-Inch Omni-Directional Fiberglass Antenna



Applications

- 3G / 4G / LTE
- 900 MHz ISM
- 2.4 GHz Wi-Fi
- M2M
- Telemetry / SCADA
- Video Security
- Marine
- Office & Home



Product Features

- Weatherproof, Compact & Lightweight
- No Ground Plane Needed
- N-Female Connector on 12" pigtail
- Pole or Wall Mountable
- Compatible with Worldwide Cellular Networks
- Compatible with most Cellular Modems/Routers
- Includes Mounting Hardware

Ordering Information

Part No.	Description
ANT-127-001	Proxicast 9 dBi 24-Inch Omni-Directional Permanent Mount Outdoor Fiberglass Antenna

General Description

Proxicast introduces the industry's first high-gain permanent mount omni-directional antenna for all 3G and 4G/LTE, xLTE, AWS frequencies. This antenna is compatible with all 3G and 4G/LTE services from Verizon Wireless, AT&T Wireless, Sprint, T-Mobile, US Cellular, Bell Mobility, Rogers Wireless, Telus, Sasktel, Telcel, Movistar, Digicel and many other cellular operators worldwide.

Proxicast's 24" multi-band cellular antenna is ideal for many outdoor applications, including building rooftops, utility poles, surveillance trailers, well sites, remote telemetry units, meters, boats, homes and offices. This omni-directional 9 dBi gain cellular antenna improves signals on all 3G & 4G/LTE cellular bands (700, 850, 900, 1700, 1800, 1900 and 2100 MHz) used in in the USA, Canada and Mexico.

This antenna is also suitable for unlicensed 900 MHz (ISM) radio applications and 2.4 GHz Wi-Fi / ISM band use.

The omni-directional design provides high gain without the cell tower location and antenna alignment hassles of directional antennas.

For MIMO applications, use our X-BOOM cross-over bracket (ANT-800-XB1) to mount 2 ANT-127-001 antennas to a single mast.

Note: Mast not included.

ANT-127-001

9 dBi 24-Inch Omni-Directional Fiberglass Antenna



Electrical Specifications

Parameter	Rating
Frequency Range	698~2700 MHz
Peak Gain	9 dBi
VSWR	≤ 3.0:1
Input Impedance	50 Ohm
Polarization	Vertical
Max Input Power	50 W
Ground Plane	Not Required
DC Grounded	Yes

Mechanical Specifications

Parameter	Rating
Connector Type	N-Female
Cable Length	11.8 in (300 mm) LMR 195 coax
Mounting	Pole or Wall Mount Includes 2.5 in dia. U-Bolts
Dimensions	0.91 x 23.6 in (23 x 600 mm)
Materials	Urethane coated fiberglass Stainless steel
Antenna Color	Grey
Weight	9.6 oz (272 g) excluding U-Bolts
Operating Temperature	-30°C to +75°C


Operation of this device outside the parameter ranges given above may cause permanent damage.

ANT-127-001


9 dBi 24-Inch Omni-Directional Fiberglass Antenna



Radiation Patterns

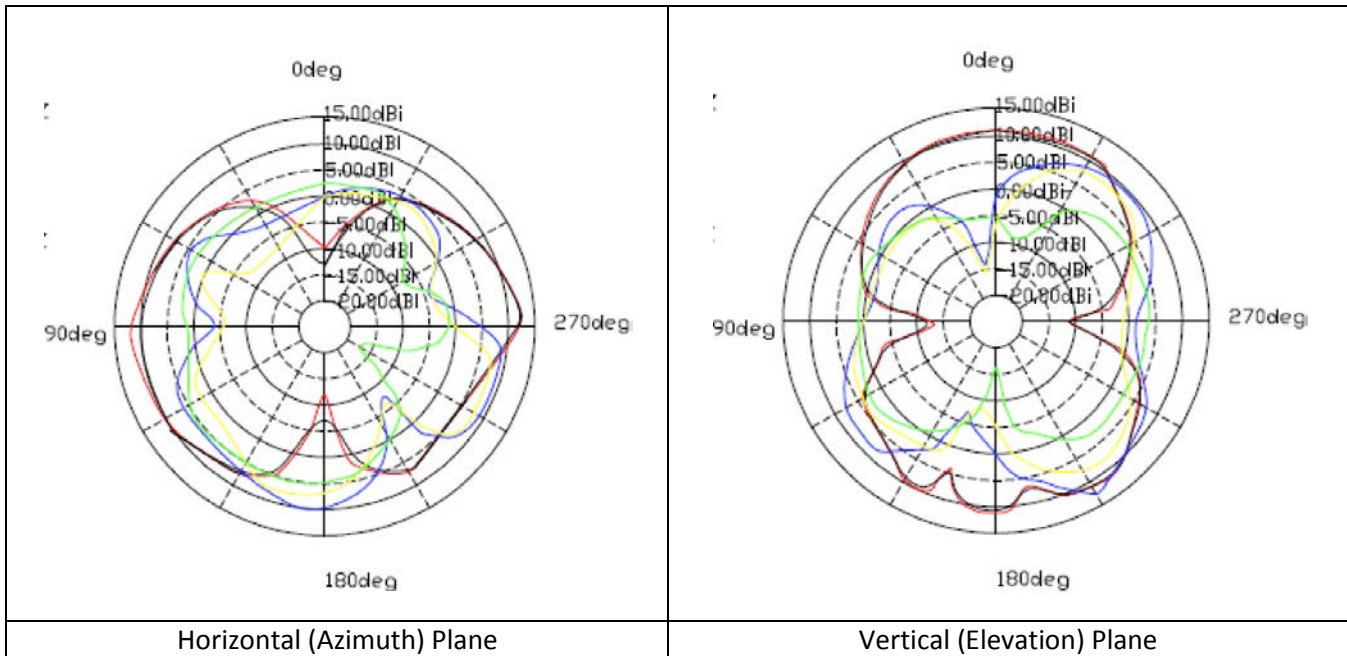

VSWR

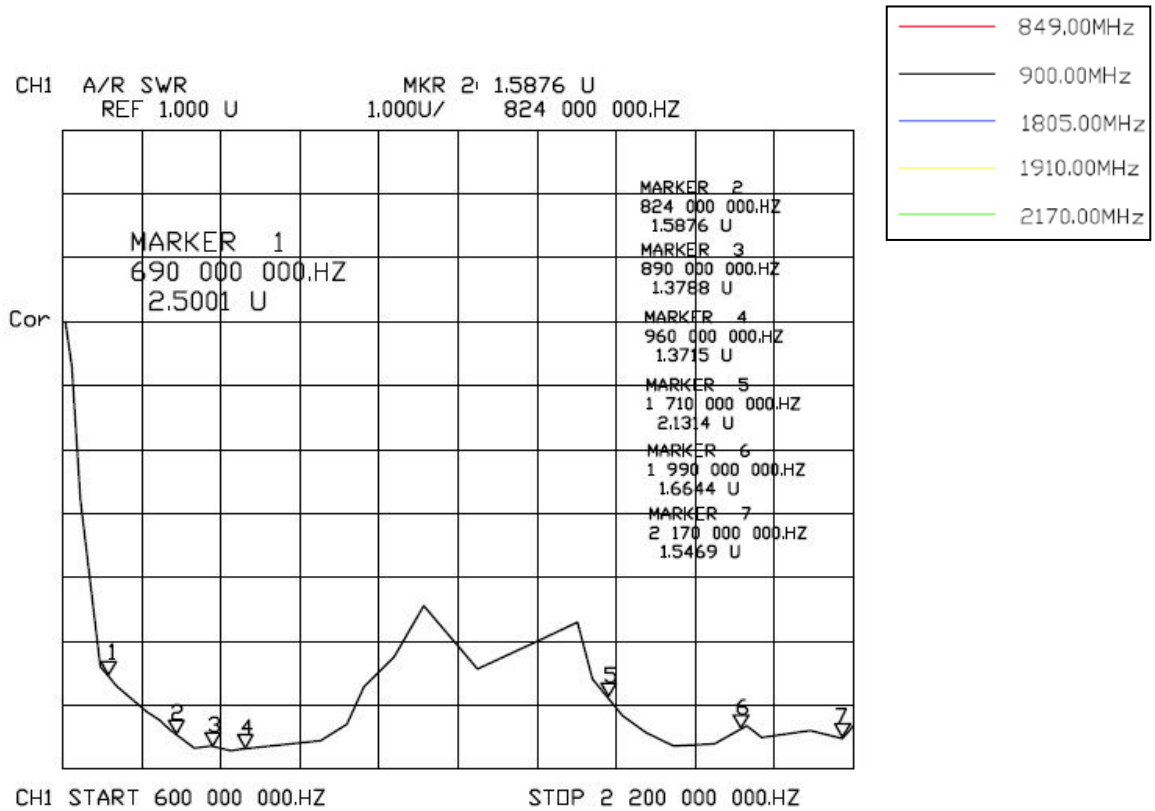


ANT-127-001

9 dBi 24-Inch Omni-Directional Fiberglass Antenna



Mechanical Dimensions

Dimensions in millimeters

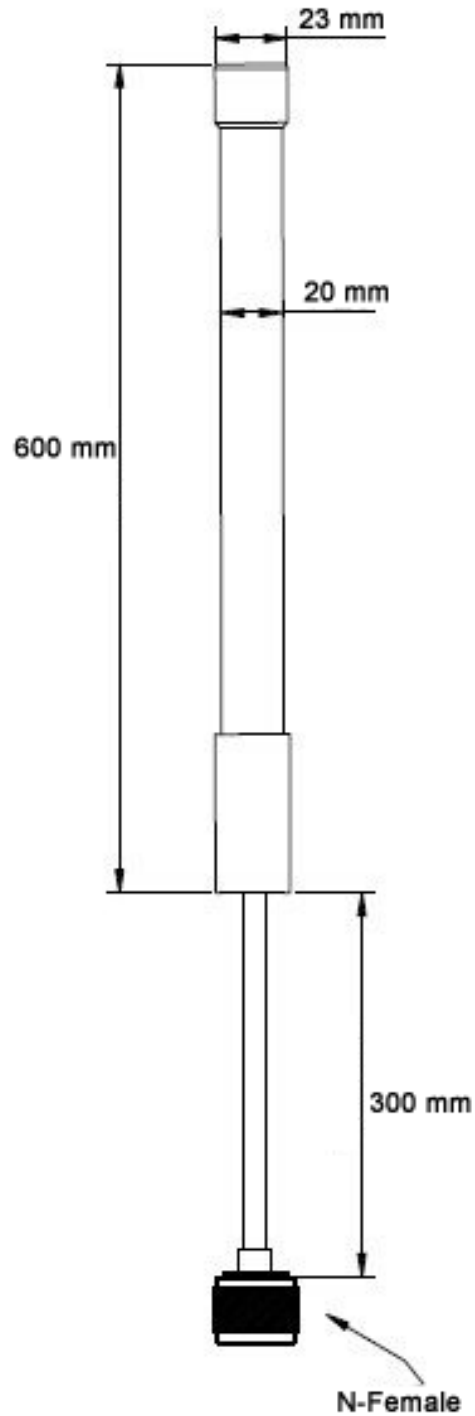

ANT-127-001

9 dBi 24-Inch Omni-Directional Fiberglass Antenna



Additional Product Images



ANT-127-001

9 dBi 24-Inch Omni-Directional Fiberglass Antenna



Contact Information

For the latest specifications, additional product information, worldwide sales and information about Proxicast:

Web: www.proxicast.com Tel: 1-877-777-7694

Email: sales@proxicast.com 1-412-213-2477

Proxicast • 312 Sunnyfield Drive, Suite 200 • Glenshaw, PA 15116 USA

For technical questions and application information:

Email: support@proxicast.com

Important Notice

The information contained herein is believed to be reliable. Proxicast makes no warranties regarding the information contained herein. Proxicast assumes no responsibility or liability whatsoever for any of the information contained herein. Proxicast assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice.

The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. Proxicast products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.